





MCA RealSubs®  
Q

1064nm 532nm

355nm 266nm @1/e<sup>2</sup>

| (nm)       | 1064              |   |      |  | 532 |   |      |  | 355 |   |      |  | 266 |   |      |  |  |
|------------|-------------------|---|------|--|-----|---|------|--|-----|---|------|--|-----|---|------|--|--|
| (kHz)      |                   |   |      |  |     |   |      |  |     |   |      |  |     |   |      |  |  |
| (mW)       |                   |   |      |  |     |   |      |  |     |   |      |  |     |   |      |  |  |
| (μJ)       |                   |   |      |  |     |   |      |  |     |   |      |  |     |   |      |  |  |
| (ps)       |                   |   | 1500 |  |     |   | 1200 |  |     |   | 1200 |  |     |   | 1200 |  |  |
| (8h)       | ±3%               |   |      |  |     |   |      |  |     |   |      |  |     |   |      |  |  |
|            | TEM <sub>00</sub> |   |      |  |     |   |      |  |     |   |      |  |     |   |      |  |  |
| Typ.(mrad) |                   | 8 |      |  |     | 6 |      |  |     | 5 |      |  |     | 5 |      |  |  |
|            | @1/e <sup>2</sup> |   | 8    |  |     |   | 6    |  |     |   | 5    |  |     |   | 5    |  |  |
|            | >100:1            |   |      |  |     |   |      |  |     |   |      |  |     |   |      |  |  |

|            |                      |
|------------|----------------------|
|            | 100-240 VAC 50/60 Hz |
|            | RS232 USB            |
| (W)        | ≤35                  |
| (WxHxL,mm) | 168x88x140           |
| (WxHxL,mm) | 45x30x120            |
| ( )        | 15-35                |
| ( )        | 0-60                 |

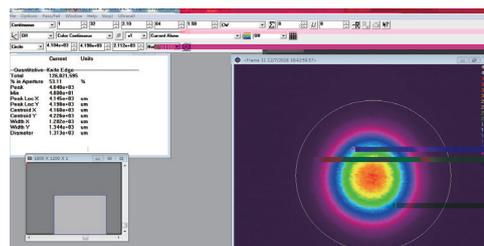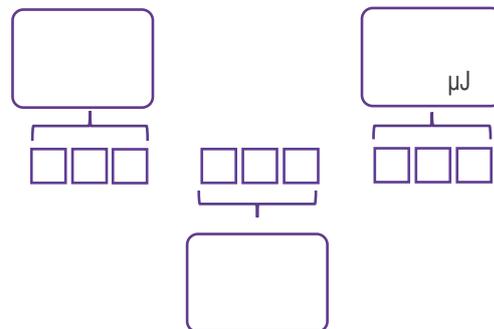

mm

( )

